

16 CH HDCVI 2 SATA HDD Analog Digital Video Recorder

Specifications




Key Features

- 16 CH with 720p real-time recording playback and live view
- H.264 video encode
- 1/4/9/16 CH synchronous real time playback
- HDMI/ VGA simultaneous video output
- Support 2 SATA HDDs up to 12 TB, 2 USB
- Digital Zoom in Live & Playback
- iPhone, iPad & Android

Standard Accessories

- Quick guide..... 1 pc
- Important safety instruction.....1 pc
- CD1pc

Appearance

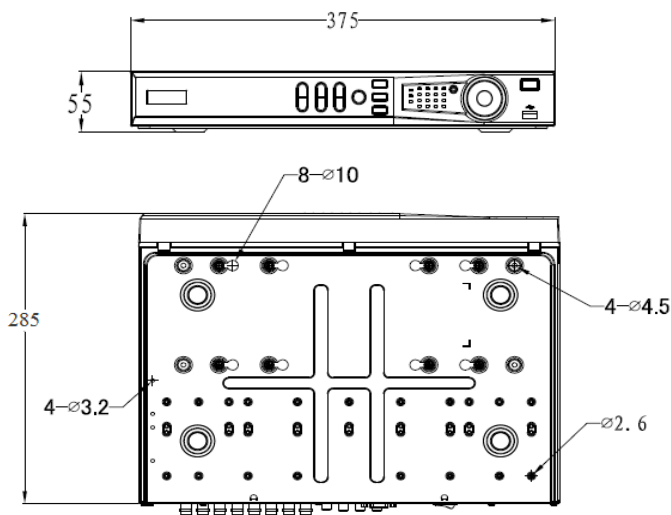

| Model | | CJ-HDR216 |
|-------------------------------|--------------|---|
| Video/ Audio IF | | |
| Video Input | | 16 CH, BNC |
| Type | HDCVI | 720p/ 1080p HDCVI |
| | Analog | NTSC/ PAL |
| Video Output | | 1 HDMI, 1 VGA |
| Audio Input | | 1 CH, RCA |
| Audio Output | | 1 CH, RCA |
| Two-way Talk | | Reuse audio input/ output CH 1 |
| Display | | |
| Output Resolution | | 1920x1080, 1280x1024, 1280x720, 1024x768 |
| Multiscreen Mode | | 1/4/8/9/16 |
| Privacy Masking | | 4 rectangular zones (each camera) |
| OSD | | Camera title, Time, Video loss, Camera lock, Motion detection, Recording |
| Video/ Audio Format | | |
| Video/Audio Compression | | H.264/ G.711 |
| Record Rate | Main Stream | 1080P (1~12/15fps)/ 720P/ 960H/ D1 (1~25/30fps) |
| | Extra Stream | CIF/ QCIF (1~25/30fps), D1 (1~12/15fps) |
| Bit Rate | | 96~4096Kb/s |
| Record Mode | | Manual, Schedule (Regular (Continuous), MD), Stop |
| Record Interval | | 1~60 min (default: 60 min), Pre-record: 1~30 sec, Post-record: 10~300 sec |
| Alarm/ Event | | |
| Trigger Events | | Recording, PTZ, Tour, Video Push, Email, FTP, Snapshot, Buzzer & Screen tips |
| Video Detection | | Motion Detection, MD Zones: 396 (22x18), Video Loss & Camera Blank |
| Playback & Backup | | |
| Sync Playback | | 1/4/9/16 |
| Search Mode | | Time/Date, MD & Exact search (accurate to second) |
| Playback Functions | | Play, Pause, Stop, Rewind, Fast play, Slow play, Next file, Previous file, Next camera, Previous camera, Full screen, Repeat, Shuffle, Backup selection, Digital zoom |
| Backup Mode | | USB Device/Network |
| Network | | |
| Network Interface | | RJ-45 port (10/100M/ 1000M) |
| Network Functions | | HTTP, IPv4/IPv6, TCP/IP, UPNP, RTSP, UDP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, SNMP, P2P |
| Max. User Access | | 128 users |
| Mobile Device | | iPhone, iPad, Android |
| HDD | | |
| Type | | 2 SATA ports, up to 12TB |
| External Interface | | |
| USB Interface | | 2 ports (1 Rear), USB2.0 |
| RS485 Camera Interface | | 1 port, For PTZ Control |
| General Specifications | | |
| Power Supply | | DC12V/5A |
| Power Consumption | | 15W (without HDD) |
| Working Environment | | -10°C~+55°C / 10%~90%RH/ 86~106kpa |
| Dimension(WxDxH) | | 1U, 375mmx285mmx55mm |
| Weight | | 2.35KG (without HDD) |

-Auto Reboot (once a week)

Important

- Safety Precaution: Carefully read the operating instruction manual before using this product.

- All pictures are simulated.
- Weights and dimensions are approximate.
- Specifications are subject to change without notice.
- These products may be subject to export control regulations.

DISTRIBUTED BY: